



INSTALLATION INSTRUCTIONS

PART No.

FB22135

Jeep® '07-'18 JK Wrangler
JK Rear Bumper Delete



REQUIRED TOOLS

16mm Socket
18mm Socket

KIT CONTAINS

Rear Bumper Delete

QTY

1

1) REMOVE YOUR REAR BUMPER

Remove your existing rear bumper according to the manufacturer's instructions, while retaining the OEM hardware.




2) APPLY THE DELETE

Place the Delete over the frame and ensure the Delete holes visually line up with the frame rail holes.



3) INSTALL HARDWARE

Reinstall the OEM hardware while using a 16mm socket for the two inner bolts, and an 18mm socket for the two outer bolts.

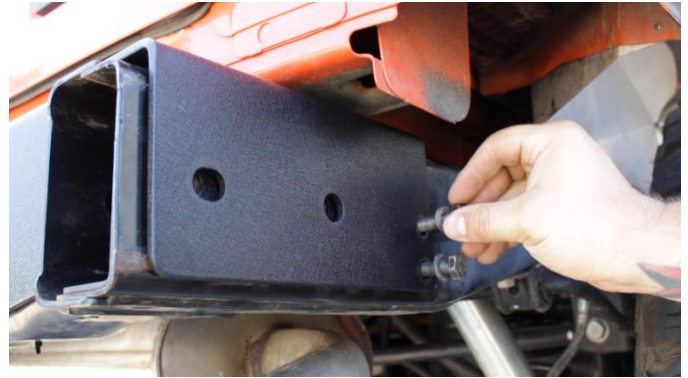



INSTALLATION INSTRUCTIONS

PART No.

FB22135

Jeep® '07-'18 JK Wrangler
JK Rear Bumper Delete

4) HONORABLE MENTION: OPTIONAL

The Rear Bumper Delete fits and looks great with our **D-Ring Frame Mounts**, Part# **FB22136**. Visit www.FishboneOffroad.com for more info on this perfect duo as well as installation instructions!



5) ENJOY YOUR NEW FISHBONE OFFROAD REAR BUMPER DELETE!