



WWW.SMITTYBILT.COM

Installation Instructions

Rear Storage Vault
07-12 Wrangler & Unlimited
Part # 2763

Read instructions entirely before installing and using this part. Drilling is required to install this part.

Parts Included	Qty
Storage Box	1
"L" Bracket	3
5/16" Hex Bolt	3
5/16" Nut	3

Parts Included	Qty
5/16" Flat Washer	6
1/4" x 1 1/4" Self Tapping Screw	10
1/4" Flat Washer	10

Note: If installing in a 2 door JK you will need to remove the rear seat from the vehicle. Due to variations between models and different manufacture options, mounting is not the same in all vehicles. The Storage Vault can be securely mounted in various ways, using the "L" brackets or box base mounting holes or a combination of both. **It is recommended to mount using 4 mounting points but the option is yours.**


Step 1: The storage vault will cover the rear oem storage area. If you have anything inside it, remove now. (Fig A) You will also need to remove your floor jack. Your new storage vault is the perfect place to store it!

NOTE: If you do not want to drill and permanently secure your box, simply slide drawer back into box and you are done.

Step 2: Remove the drawer from the box completely. Pull the drawer out and release side locking clamps. (Push down on the left side (Fig B) and push up on the right side.) This will enable you to remove it.



(Fig A)

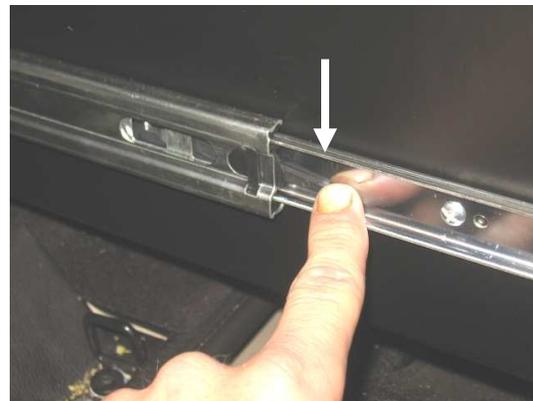

(Fig B)

Step 3: Set the box in back of vehicle. (Fig C) Center the box as best as you can. Make sure box drawer will not interfere with tailgate latch. (Fig D)

- On 2-Doors push box back until its next to the rear oem seat bracket (Fig E)
- On 4-Doors push box back approx. one inch in front of the oem strap brackets. (Fig F)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

Rear Storage Vault
07-12 Wrangler & Unlimited
Part # 2763

Rear “L” Mounting Brackets

On most 4-door models you can mount the rear of the box using the included “L” brackets. Fold rear seat forward. Remove the two strap brackets using a #30 Torx bit. Place the included “L” bracket over the hole and secure using the bolt you just removed. Use a scribe or other sharp object to mark a hole on the back of the box then remove bracket and drill a 5/16” hole. (Fig F, G)

On 2-door models you will need to drill both holes for the rear “L” brackets. (floor and box) Place bracket in desired location and mark holes both on the box and carpet. Its recommended to cut a small hole in the carpet where marked in order to install the screw easier. (Fig H) Drill a pilot hole and then install bracket onto floor using the included self tapping screws. (Fig L)



Always use caution when drilling. Make sure there are no obstructions before doing so. (Fig I)


Secure brackets to the floor. Do not attach box to the brackets at this time.



(Fig C)



(Fig D)

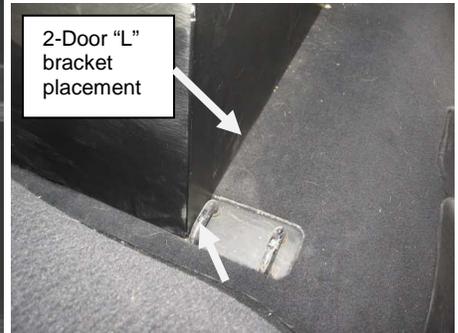

(Fig E)



(Fig F)



(Fig G)



(Fig H)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM


Installation Instructions

Rear Storage Vault
07-12 Wrangler & Unlimited
Part # 2763

Front / Inside Mounting

On some 4-door models you can mount the front right side of the box using the included “L” bracket. Remove the strap bracket located in front of the 12v outlet using a #30 Torx bit. (Fig J) Place the included “L” bracket over hole and secure using the bolt you just removed. Use a scribe or other sharp object to mark hole on the side of the box then remove bracket and drill a 5/16” hole. (Fig F, G)


On other models you will need to drill both holes in the front, using the pre-drilled holes in the bottom of the box as a template. If you did not use the “L” brackets on the rear of the box there are 4 holes on the inside of the box base to use as mounting points. Making sure box is in desired location mark the holes using a white wax or paint pin in order to show up on the carpet. (Fig K) Be sure too note the location of the box in order for the holes to lineup when installing the screws. Remove the box and set to the side. Its recommended to cut a small hole in the carpet where marked in order to install the screws easier. (Fig H) Drill a pilot hole through the carpet and floor. (Fig L) Set box back into vehicle in the same location it was previously in. (Fig C) Secure with self tapping screw and fender washer. (Fig M) Do not tighten completely at this time.

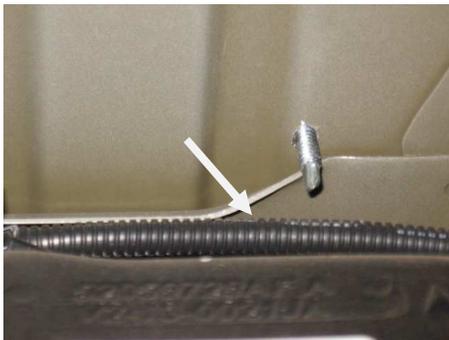

(Fig I)



(Fig J)

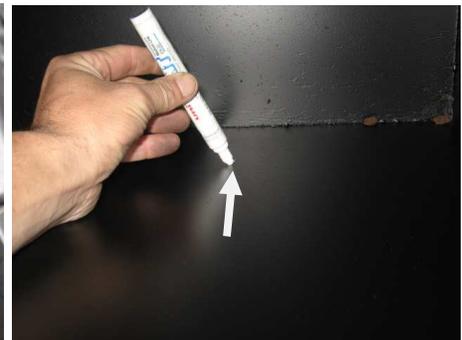

(Fig K)



(Fig L)



(Fig M)



(Fig N)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

**Rear Storage Vault
07-12 Wrangler & Unlimited
Part # 2763**

If using "L" brackets on the rear and or one side, insert a 5/16" hex bolt through the bracket into the box. Begin to tighten the hex bolts. It's best to tighten each one a little bit in a round pattern instead of one completely at a time. This will help you get your box level as close as possible. Once all screws are secure on the inside base of the box, proceed to tighten all of the "L" bracket hardware.

After going back to make sure all hardware is tight, re-install the drawer into the box. Installation is now complete. (Fig O, P, Q)



(Fig O)



(Fig P)



(Fig Q)

The latch is adjustable in order to get a tighter or lose fitting door by loosening, turning and the tightening the two nuts located on each side of the latch (Fig R)

Even with Storage Vault installed you still have room to add Smittybilts GEAR tailgate cover for even more storage. (Fig S, T)



(Fig R)



(Fig S)



(Fig T)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions
Rear Storage Vault
07-12 Wrangler & Unlimited
Part # 2763

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220